



用心细心精心
品质永保称心



地址：江苏省宿迁市经济技术开发区叶东路1号
Add: No.1 Yedong Road , Economic Development
Zone of Suqian City , Jiangsu Province

网址/Website: www.shixintape.com

电话/Tel.: +86-0527 80971227

微信/Wechat: 13915345950 (邹先生)

WhatsApp: 008615951360053 (Mr Cheng)

邮箱/E-mail: marsgong@shixintape.com

传真/Fax.: +86-0527 80971227

13915347038 (曹先生)

008618114879832 (Mr Zou)

sunnyfang@shixintape.com

江苏世信胶粘带制品有限公司
Jiangsu Shixin Adhesive Tape Product Co., Ltd



■ 公司简介

我司于2005年在江苏无锡注册成立了无锡世信胶粘带制品有限公司，主营各类胶粘带产品;经过了近二十年的坚持奋斗，公司茁壮成长，规模逐渐扩大，并于2018年在江苏宿迁投资新建厂房，成立了江苏世信胶粘带制品有限公司;目前我司已成为一家集研发、生产与销售为一体的高新技术企业。公司始终坚信“品质与信誉是立足之本”的信念，不断培养技术型人员，加强开发新产品，完善销售配套，努力为客户提供更好的产品与服务。

公司占地约11000平方米，目前配备有国内先进的生产设备与生产工艺，主要生产多种铝箔胶带、热封铝箔胶带、牛皮纸胶带、PET胶带、PU/PE泡棉胶带等产品;产品广泛用于日常生活、冰箱/空调/厨房制冷设备、电子元件、卫浴产品、室内工程等领域;主要与美的集团，TCL，创维家电、康佳、上菱电器、韩电电器、金鱼集团等配套。在发展过程中，企业始终坚持科学化标准化管理，已通过了ISO9001国际质量认证体系，产品也通过了第三方权威检测机构的环保认证，以及获得了多项专利；通过多方的管控以确保提供给客户优良的产品和有竞争性的价格，也确保企业自身在市场竞争中健康、稳步地发展，坚持做到“信誉第一，客户至上，勇于创新，追求卓越”的企业理念。

■ Company profile

Founded in Wuxi, Jiangsu in 2005, Wuxi Shixin Adhesive Tape Products Co., Ltd. specializes in various adhesive tapes. Growing steadily over nearly two decades, it expanded to Suqian in 2018 with Jiangsu Shixin Adhesive Tape Products Co., Ltd. At present, Shixin has become a high-tech enterprise integrating R&D, production, and sales, it upholds "quality and reputation as the foundation", invests in R&D and talent, and strives to deliver superior products and services.



Covering 11,000 square meters, Shixin has equipped with advanced domestic production facilities, manufacturing aluminum foil tape, kraft paper tape, PET tape, PU/PE foam tape, etc. Its products serve sectors like daily life, refrigeration (fridges/ACs), electronics, and sanitation, partnering with Midea, TCL, Skyworth, KEG group, Konka, Shangling, Goldfish and more. Certified with ISO9001 and environmental standards, and holding multiple patents, it ensures high-quality, competitive offerings. Guided by the philosophy "reputation first, customer-centric, innovation-driven, pursuit of excellence", it sustains healthy market growth.

Aluminum Foil Tape With Liner

有衬纸铝箔胶带



构造
Structure



铝箔 Aluminum foil
压敏胶 Water base/ Solvent / Hot melt Acrylic/ Silicone
离型纸/膜 PET/ kraft /white silicone paper

参数
Performance

型号 Item	铝箔厚度 Aluminum Foil Thickness	总厚 Total Thickness	初粘性 Tack	持粘力 Holding Power	剥离力 Peel Adhesion	抗拉强度 Tensile Strength
SXATP-01W	0.035mm	0.07mm	15#	≥24h	≥4n/cm	≥20n/cm
SXATP-01S	0.035mm	0.07mm	15#	≥24h	≥6n/cm	≥20n/cm
SXATP-01H	0.035mm	0.07mm	15#	≥24h	≥5n/cm	≥20n/cm
SXATP-01G	0.05mm	0.08mm	/	≥24h	≥4n/cm	耐温 -40°C~160°C


Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性
Feature

- 胶粘性优良
- 基材反射性能佳
- 易解卷
- 耐温性良好
- Excellent adhesion levels
- High reflection backing
- Easy unwinding and tearing
- Good high temperature resistance

应用
Application

- 冰箱、空调等制冷系统的管路的固定
- 室内工程使用的管道密封连接
- 家庭日常金属表面的修补及密封
- Refrigerator and air conditioner attachment tube fastening
- Duct work joining and sealing application- indoor
- General purpose holding, patching, sealing and masking applications-indoor


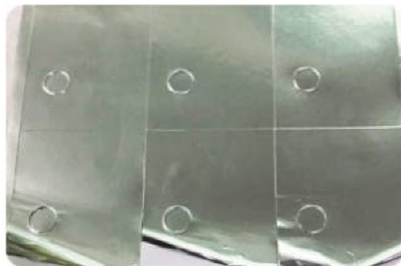


Aluminum Foil Tape Film Laminated

覆膜铝箔胶带



构造
Structure



铝箔 Aluminum foil
复合胶 Compound Adhesive
离型膜 Release Film
压敏胶 Water base/Solvent/Rubber

参数
Performance

型号 Item	铝箔厚度 Aluminum Foil Thickness	总厚 Total Thickness	初粘性 Tack	持粘力 Holding Power	剥离力 Peel Adhesion	抗拉强度 Tensile Strength	发泡率 Foaming Ratio
SXATL-02W	0.012mm	0.06mm	15#	≥24h	≥4n/cm	≥20n/cm	/
SXATL-02S	0.012mm	0.06mm	15#	≥24h	≥6n/cm	≥20n/cm	/
SXATL-02R	0.012mm	0.06mm	/	≥24h	≥6n/cm	≥20n/cm	≥80%

Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性
Feature

- 胶粘性优良
- 基材反射性能佳
- 方便使用，无浪费
- 保温密封性优良
- Excellent adhesion levels
- High reflection backing
- Convenient operation and cost efficiency
- Good thermal insulation

应用
Application

- 冰箱、空调等制冷系统的管路的固定
- 室内工程使用的管道密封连接
- 家庭日常金属表面的修补及密封
- Refrigerator and air conditioner attachment tube fastening
- Duct work joining and sealing application- indoor
- General purpose holding, patching, sealing and masking applications-indoor





Aluminum Foil Tape Without Liner

无衬纸纯铝箔胶带



构造 Structure



- 离型层 Release layer (anti-sticky, easy for peeling)
- 铝箔 Aluminum foil
- 压敏胶 Water base/ Solvent / Rubber

参数 Performance

型号 Item	铝箔厚度 Aluminum Foil Thickness	总厚 Total Thickness	初粘性 Tack	持粘力 Holding Power	剥离力 Peel Adhesion	抗拉强度 Tensile Strength	发泡率 Foaming Ratio
SXATW-03W	0.035mm	0.07mm	15#	≥24h	≥4n/cm	≥20n/cm	/
SXATW-03R	0.035mm	0.07mm	/	≥24h	≥6n/cm	≥20n/cm	≥80%


Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性 Feature

- 胶粘性优良
- 基材反射性能佳
- 密封性优良
- 耐温性良好
- Excellent adhesion levels
- High reflection backing
- Good sealing property
- Excellent high-temperature resistance

应用 Application

- 冰箱、冷柜等制冷系统的管路的固定
- 空调、热水器管道的密封
- 家庭日常金属表面的修补及密封
- Refrigerator and air conditioner attachment tube fastening
- Air conditioner and heat boiler tube sealing
- General purpose holding, patching, sealing and masking applications-indoor


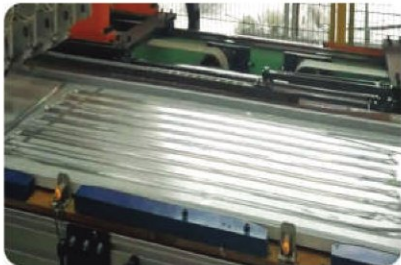


Heat-seal Aluminum Foil Tape

热合型铝箔胶带



构造 Structure



- 热封粘合剂 PVC layer
- 铝箔 Aluminum foil
- 压敏胶 Acrylic Water base/ Solvent base
- 离型纸/膜 CCK/PET/Glassine/kraft

参数 Performance

型号 Item	铝箔厚度 Aluminum Foil Thickness	总厚 Total Thickness	初粘性 Tack	持粘力 Holding Power	剥离力 Peel Adhesion	抗拉强度 Tensile Strength
SXATH-04W	0.05mm	0.09mm	15#	≥24h	≥4n/cm	≥30n/cm
SXATH-04S	0.05mm	0.09mm	15#	≥24h	≥5n/cm	≥30n/cm


Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性 Feature

- 胶粘性优良
- 原材料环保
- 耐温性良好
- 应用范围广
- Excellent adhesion levels
- Environmentally friendly materials
- Excellent high-temperature resistance
- Wide application

应用 Application


- 冰箱、冷柜等家电中使用的加热线
- 家用加热马桶盖
- 可加热宠物窝
- 电子烟加热器
- Used for heating cable elements in home appliances such as Refrigerator and Cooler
- Toilet seat heating cover
- Heatable pet beds
- e-cigarette heating element

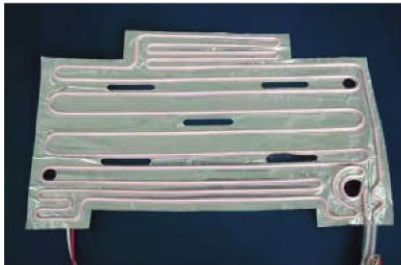

Protective Film Tape
保护膜胶带



构造
Structure

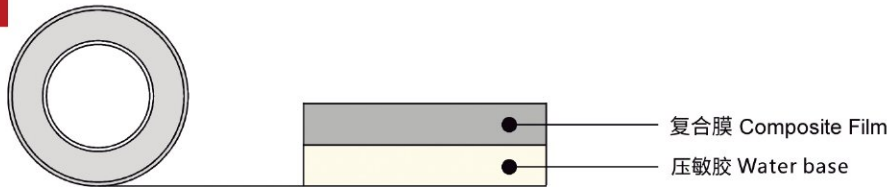

参数
Performance

型号 Item	基材厚度 Material Thickness	剥离力 Adhesion To Steel	初粘性 Tack	持粘性 Holding Power	抗拉强度 Tensile Strength	耐磨 Wear Resistance
SXOPP-90W	0.06mm	2.5N/cm	10#	≥12h	150N/25mm	10000次
SXOPP-80W	0.05mm	2.5N/cm	10#	≥12h	120N/25mm	7000次

Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性
Feature

- 产品有良好耐磨性，耐破性，材料成本低的优点
- The product has the advantages of good abrasion resistance, tear resistance, and low material cost.
- 配合自动贴敷机使用，可极大的降低人工成本，提升工作效率。
- When used in conjunction with an automatic applicator, it can significantly reduce labor costs and improve work efficiency.

应用
Application


- 用于冰箱，空调，洗衣机等家电EPS底座的防护
- It is used for the protection of EPS bases in household appliances such as refrigerators, air conditioners, and washing machines.



Kraft Paper Tape
牛皮纸胶带



构造
Structure

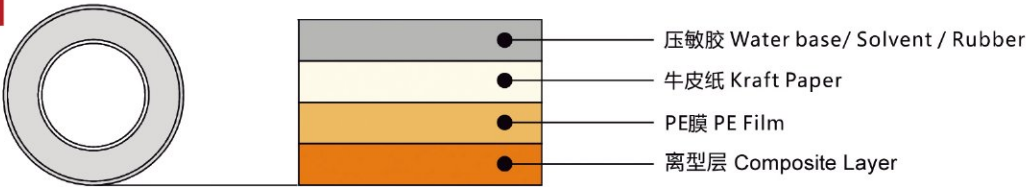

参数
Performance

型号 Item	基材厚度 Kraft Paper Thickness	总厚 Total Thickness	初粘性 Tack	持粘力 Holding Power	剥离力 Peel Adhesion	抗拉强度 Tensile Strength
SXKPT-20H	0.09mm	0.14mm	10#	≥24h	≥5n/cm	/
SXKPT-20W	0.09mm	0.13mm	10#	≥24h	≥4n/cm	/


Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性
Feature

- 胶粘性优良
- Excellent adhesion levels;
- 使用方便，易手撕
- convenient operating and easy tearing
- 环保易降解
- Environmentally friendly and easily degradable
- 封箱效果美观
- Perfect appearance of packaging

应用
Application

- 普通产品包装
- General product packaging
- 遮蔽牛皮纸箱外包装印字
- Covers carton printing
(Prevents customer information leakage)

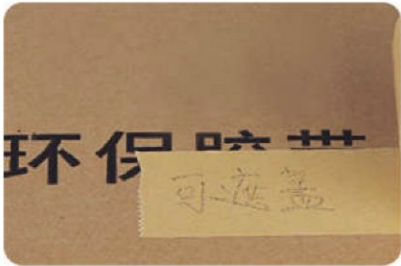


PET Tape

PET胶带



构造
Structure



PET 离型膜 PET Release Film
天然橡胶/丙烯酸压敏胶 Natural rubber/Acrylic

参数
Performance

型号 Item	PET厚度 PET Thickness	剥离强度 Peel Adhesion	初粘性 Tack	持粘性 Holding Power	耐温性 Temperature Endurance	残胶 Adhesive Residue
SXPET-30S	0.03mm	2.0N/cm	4#	≥24h	70°C/2h	不移胶/ No
SXPET-30R	0.03mm	2.5N/cm	4#	≥24h	80°C/2h	不移胶/ No

Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性
Feature

- 抗拉性优良
- 耐温性良好
- 易撕离
- 不残胶
- Good tensile strength;
- Excellent high-temperature resistance
- Easy to peel off
- Leaving no residue

应用
Application

- 冰箱、冷柜的固定
- 打印机活动部件的固定
- Refrigerator and Freezer cabinet fasten
- Printer and digital product moving parts fastening





PU Foam Tape

PU海绵胶带



构造
Structure



PU海绵 PU Foam
热熔胶/水胶/油胶 Hot melt/ Water base/Solvent
离型纸 Release Paper

参数
Performance

型号 Item	基材 Backing	颜色 Colour	厚度 Thickness	密度 density	阻燃性 Flame retardancy
SXPU-05H	PU	白(white)黑(black)	5-20mm	20kg/m³	按客户要求 According to customer requirements
SXPU-05S	PU	白(white)黑(black)	5-20mm	20kg/m³	Antiflaming
SXPU-05W	PU	白(white)黑(black)	5-20mm	20kg/m³	Antiflaming


Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性
Feature

- 有缓冲作用
- 保温性优良
- 有隔音作用
- 可操作性强
- Cushioning effect
- Good thermal insulation
- Sound insulation
- Easy to operate

应用
Application


- 冰箱、空调家电内部部件的固定
- 室内工程的隔音
- Fastening of internal components in refrigerators and air conditioners
- Sound insulation in indoor projects

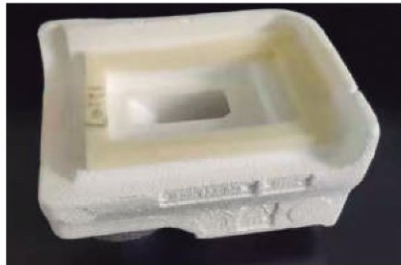

PE Foam Tape
PE 泡棉胶带



构造
Structure

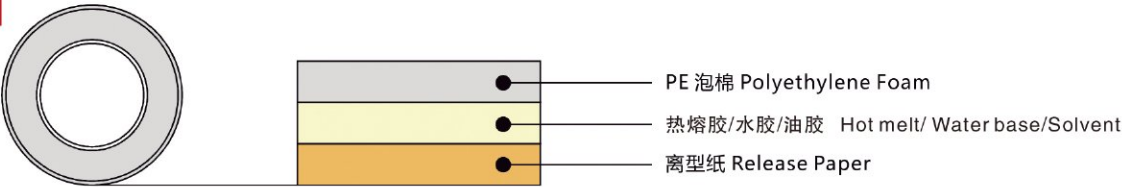

参数
Performance

型号 Item	发泡倍率 Foaming Ratio	剥离强度 Peel Adhesion	初粘性 Tack	耐温性 Temperature Endurance	隔热系数 Insulation Coefficient	延伸率 Tensile Elongation	颜色 Colour
SXPE-20H	20	4N/cm	12#	-10℃~60℃	≤0.04	≥150%	白/黑 white/black
SXPE-30H	30	4N/cm	12#	-10℃~60℃	≤0.04	≥130%	白/黑 white/black
SXPE-35H	35	4N/cm	12#	-10℃~60℃	≤0.04	≥100%	白/黑 white/black

Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性
Feature

- 有缓冲作用
- 保温性优良
- 密封性优良
- 可操作性强
- Cushioning effect
- Good thermal insulation
- Excellent sealing performance
- Easy to operate

应用
Application


- 日常用品的固定
- 家用电器内部部件防震
- Daily supplies fasten
- Home appliances inside parts shock-proof



Double Sided
Tissue Tape
双面胶带



构造
Structure

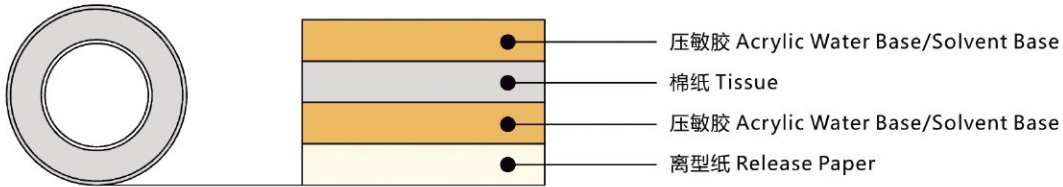

参数
Performance

型号 Item	总厚度 Total Thickness	剥离强度 Peel Adhesion	初粘性 Tack	持粘性 Holding Power	耐温性 Temperature Endurance
SXDT-40W	0.11 mm	4N/cm	12#	≥24h	-10℃~60℃
SXDT-40S	0.11 mm	6N/cm	12#	≥24h	-30℃~120℃
SXDT-40H	0.11 mm	6N/cm	10#	≥12h	-10℃~60℃

Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性
Feature

- 胶粘性稳定
- 耐温性优良
- 使用性广
- Adhesive property stability
- Excellent high-temperature resistance
- Wide application


应用
Application

- 日常物品的固定
- Daily supplies fasten



Cloth Base Tape

布基胶带

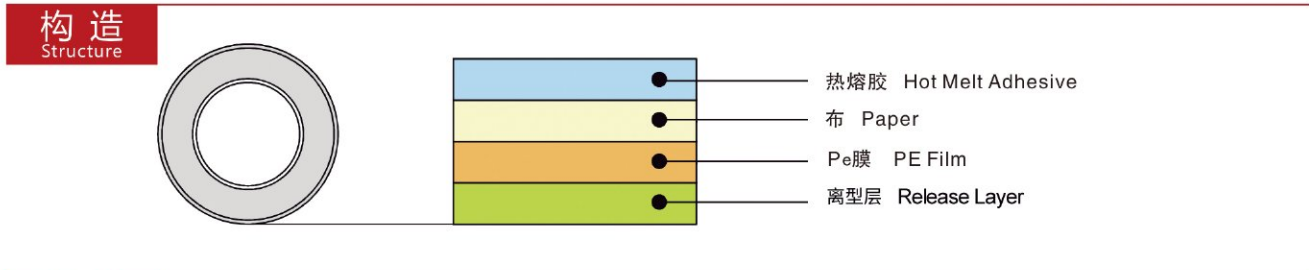

参数
Performance

型号 Item	总厚度 Total Thickness	胶系 Glue	剥离强度 Peel Adhesion	初粘性 Tack	持粘性 Holding Power	抗拉强度 Tensile Strength
SXBC-1201H	0.17 mm	热熔胶 Hot Melt	4N/cm	≥12#	≥5h	≥30N/cm

Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.



- 特性**
Feature
- 胶水粘着力强，高温作用下可快速粘合。
 - Strong adhesion, quick bonding under high temperature
 - 长时间粘贴效果好，不易起翘。
 - Long time adhesive performance
 - 具有优良的抗拉强度和耐磨性。
 - Excellent tensile strength and wear resistance

- 应用**
Application
- 可应用于包装行业、物流运输行业、建筑装修行业、电气电子行业
 - Applicable in packaging, logistics, construction & decoration, and electrical & electronic industries



MOPP Tape

MOPP胶带

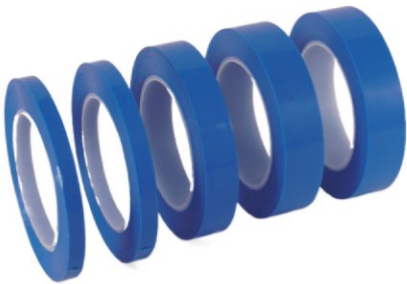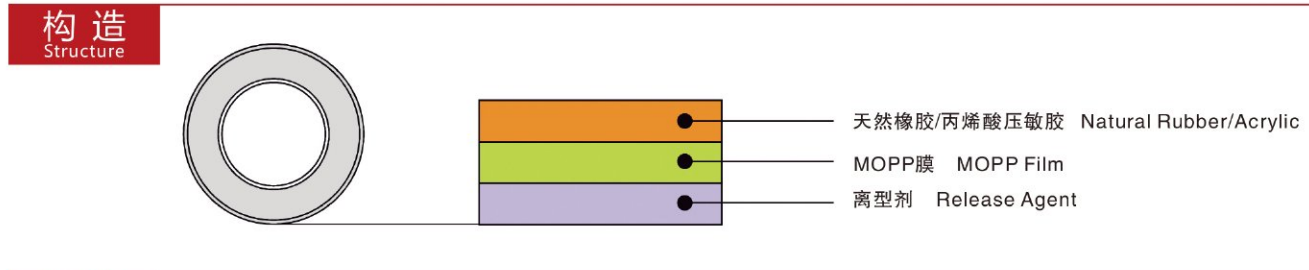


参数
Performance

型号 Item	总厚度 Total Thickness	胶系 Glue	剥离强度 Peel Adhesion	初粘性 Tack	持粘性 Holding Power	抗拉强度 Tensile Strength
SXMOPP-1054S	0.105mm	丙烯酸 /Acrylic	3N/cm	≥14#	≥24h	≥200N/cm
SXMOPP-1054R	0.105mm	天然橡胶 Natural rubber	3N/cm	≥14#	≥24h	≥200N/cm
SXMOPP-8004S	0.07mm	丙烯酸 /Acrylic	2.5N/cm	≥10#	≥24h	≥100N/cm
SXMOPP-8004R	0.07mm	天然橡胶 Natural rubber	2.5N/cm	≥10#	≥24h	≥100N/cm

Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

- 特性**
Feature
- 具有高抗拉强度；
 - High tensile strength
 - 更低的延伸率
 - Lower elongation
 - 在高温下移除时无残胶。
 - There is no residue when removed at high temperature.

- 应用**
Application
- 应用于塑胶类家电的固定封口；冰箱，空调、洗衣机、微波炉、打印机、等家电产品的固定；固定铜，铁盒塑料材料管子；
 - Applicable to the sealing and fastening of plastic home appliances; the fastening of home appliances such as refrigerators, air conditioners, washing machines, microwave ovens, printers, etc.; and the fastening of copper, iron, and plastic pipes.

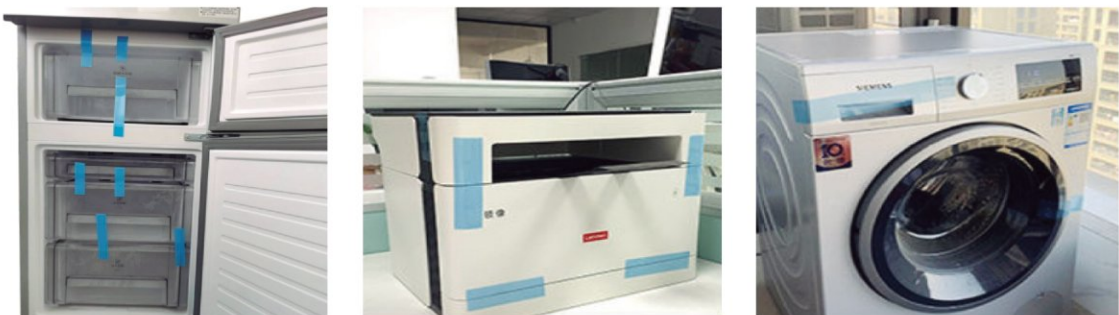


Automobile High Temperature Resistance Fiberglass Alu-foil Tape

汽车玻纤布铝箔胶带



构造 Structure

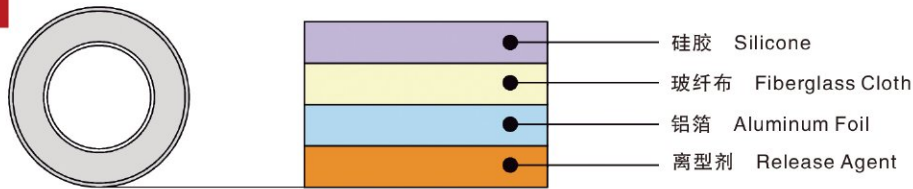

参数 Performance

型号 Item	总厚度 Total Thickness	胶系 Glue	剥离强度 Peel Adhesion	热老化(250℃) Thermal Ageing	瞬间耐温 Temperature Resistance	抗拉强度 Tensile Strength
SXGAL-90G	170μ	有机硅 / Silicone	4N/cm	≥6h	260℃	≥260N/cm


Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性 Feature

- 能够耐受化学物质对胶带的腐蚀和损害
- 能够有效隔离和反射热量，保护温度敏感材料及保温效果
- 具有卓越的耐高温性能和耐潮性。
- 具备优异的阻燃性能，能降低火灾风险
- Anti chemical corrosion and damage
- Good thermal insulation performance
- Excellent high temperature resistance and moisture resistance
- Excellent Fire retard performance

应用 Application

- 汽车玻纤铝箔胶带广泛应用于汽车工业中，主要用于保护和维持电气线束及敏感元件。其耐高温、热反射、阻燃等特性使其能在发动机区域的理想的阻隔发动机的高温。
- Glass fiber aluminum foil tape is widely used in the automotive industry, mainly for protecting and maintaining electrical wiring harnesses and sensitive components. Its high temperature resistance, heat reflection, flame retardancy, and other features make it an ideal barrier against engine heat in the engine area.

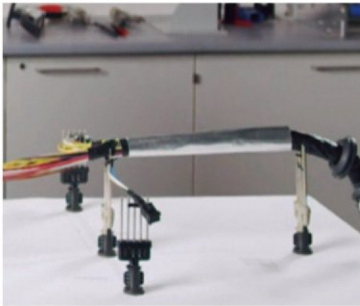


Fiberglass Alu-foil Tape

玻纤布铝箔胶带



构造 Structure

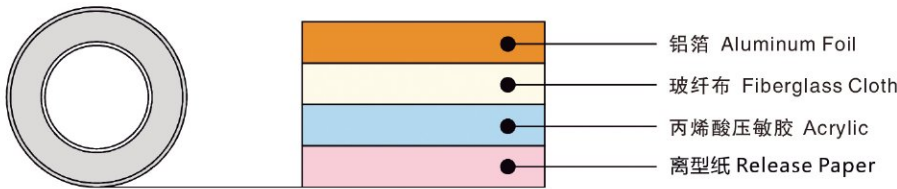

参数 Performance

型号 Item	铝箔厚度 Alum Foil Thickness	总厚度 Total Thickness	剥离强度 Peel Adhesion	初粘性 Tack	持粘性 Holding Power	抗拉强度 Tensile Strength
SXGAL-60W	7μ	100μ	4 N/cm	≥10#	≥24h	≥100N/cm
SXGAL-75S	7μ	120μ	6 N/cm	≥10#	≥24h	≥120N/cm

Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性 Feature

- 能够耐受化学物质对胶带的腐蚀和损害
- 能够有效隔离和反射热量，保护温度敏感材料
- 具有卓越的耐高温性能和耐潮性。
- Anti chemical corrosion and damage
- Good thermal insulation performance
- Excellent high temperature resistance and moisture resistance

应用 Application


- 应用于空调管道以及建筑行业的困扎；油烟机连接缝处的密封；工程管道保温隔热。
- Used in air conditioning pipes and construction industry,sealing joints (e.g., range hoods) and thermal insulation for engineering pipelines



PE Protective Film Tape
PE保护膜胶带



构造
Structure

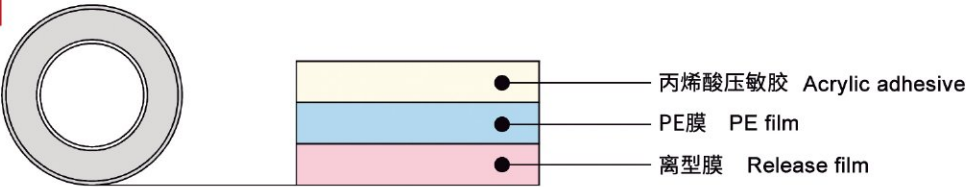

参数
Performance

型号 Item	基材 Carrier	基材厚度 Carrier thickness	剥离力 Adhesion to steel	断裂伸长率 Elongation at break	颜色 Color
SXPE-06-60W	Polyethylene	30μm	≥1.5N/cm	180%	White/Blue

Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性
Feature

- 有缓冲作用
- 保温性优良
- 密封性优良
- 可操作性强
- Cushioning effect.
- Good thermal insulation.
- Good sealing property.
- Strong operability.

应用
Application


- 金属板、铝塑板、木板、玻璃等材料表面的保护
- 电器的表面保护。
- Surface protection for materials (e.g., metal sheets, aluminum-plastic panels, wooden boards, glass) and appliances.



FSK Reinforced Alu-Foil Tape
FSK 加筋铝箔胶带



构造
Structure

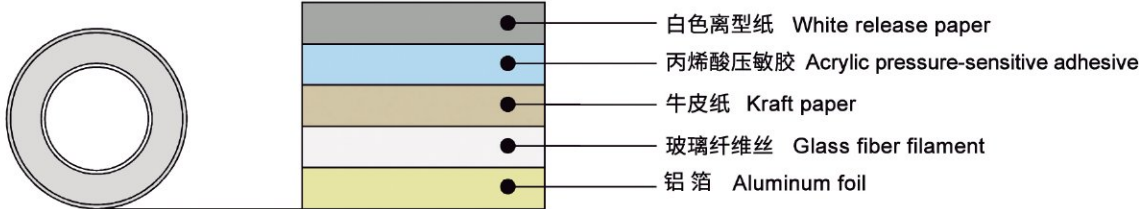

参数
Performance

型号 Item	铝箔厚度 Alum Foil Thickness	剥离力 Adhesion to steel	初粘性 Tack	断裂伸长率 Elongation at break	抗拉强度 Tensile Strength	工作温度 Operating temperature	使用温度 Service temperature
SXPE-FSK-01W	7μm	≥4N/cm	12#	1%	≥50N/cm	-10℃~40℃	-10℃~60℃
SXPE-FSK-01S	7μm	≥6N/cm	10#	1%	≥50N/cm	-10℃~60℃	-10℃~80℃

Note1: Information and data are for universal values of product testing, and do not represent the actual value of each product.
Note2: Other thickness,width and length can be customized according to customer request.

特性
Feature

- 柔软材质，便于表面粘附
- 层压材料增强产品抗拉强度和抗老化性能
- 环保
- 紧凑尺寸，便于运输和储存
- Soft texture for easy surface adhesion
- Laminated material enhances product tensile strength and anti-aging performance
- Environmentally friendly
- Compact size for easy transportation and storage

应用
Application


- 暖通空调管道包裹和保温
- 保温材料接缝密封
- 管道板气密接缝
- 玻璃纤维衬面的防潮膜
- HVAC duct wrapping & insulation
- Insulation material joint sealing
- Duct board airtight seaming
- Vapor barrier for fiberglass facings



■ 品质管控 Quality Control

原料进料检验
Raw materials incoming inspection
Record the quality of each batch of raw material and evaluate suppliers according to the record.

出货包装检验
Shipment Inspection
Check products package and shipping mark before loading date.

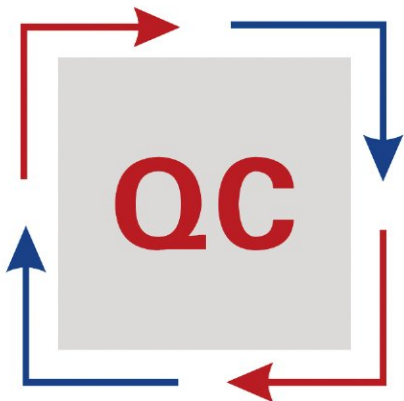


生产过程检验
Production process inspection
Each inspector each shift, checking quality randomly when coating and slitting.

成品性能检验
Finished product inspection
Inspect products appearance and performance by AQL standards.

■ 实验设备 Lab Equipment



■ 检测证书 Quality Certificate

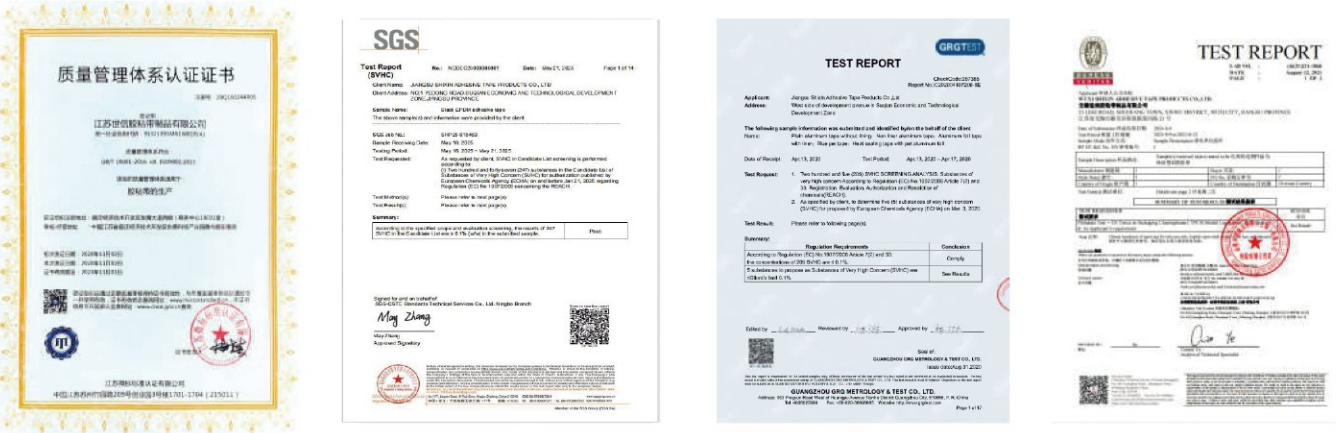

■ 工厂内景 Factory Pictures

